



Engineers Architects Planners

Gale Associates, Inc.

15 Constitution Drive | Bedford NH 03110-6042

P 603.471.1887 866.732.4253 F 603.471.1809 www.gainc.com

E-mail

Number of pages
including cover sheet:

9

To:

All Bidders

Fax Number:

From:

Stuart A. Moncrieff, P.E.
Gale Associates, Inc.

Job Number:

777033

Date:

February 16, 2018

Digitally signed by
Stuart A. Moncrieff
DN: cn=Stuart A.
Moncrieff, o=Gale
Associates, Inc., ou,
email=sam@gainc.
com, c=US
Date: 2018.02.16
12:39:50 -05'00'

Message:

Attached is Addendum No.1 to the Contract Documents for:

CONSTRUCT T-HANGARS

AIP NO. 3-25-0020-XXX-2018 (Pending)

**GARDNER MUNICIPAL AIRPORT
GARDNER, MASSACHUSETTS**

Per the Contract Documents, all bidders shall acknowledge receipt of this addendum by printing their company name, date, and name of an authorized representative in the spaces provided below, signing this sheet and returning it to Gale Associates, Inc. either by fax at 603-471-1809 or else by email to sam@gainc.com by no later than 1:00 p.m. on Wednesday, February 21, 2018.

Acknowledgment

Company Name:

Name of Authorized Representative:

Signature of Authorized Representative:

Date:

If you do not receive the number of pages specified, please contact the sender.

ADDENDUM NO. 1

GARDNER MUNICIPAL AIRPORT

CONSTRUCT T-HANGARS

AIP NO. 3-25-0020-XXX-2018 (Pending)

The attention of all bidders submitting proposals for the above project is called to the following changes to the Contract Documents. The items set forth herein, whether of clarification, omission, addition, or substitution are to be included in and shall form a part of the proposal submitted.

Bidders shall acknowledge receipt of the Addendum by writing the words, “**Addendum No. 1**” and inserting a date of **February 16, 2018** on the lines provided for such on Page P-1 (General Bidders) or Page P-11 (Filed Sub-Bidders) as appropriate, of the Proposal Documents.

SPECIFICATIONS – TECHNICAL SPECIFICATIONS

Addendum Item No. 1.1

REVISE, in Specification section M-002-I, part 1.01, item B, which reads:

B. Specification requirements for the Filed Sub-Bid “Electrical” include all of the following listed Specification sections, in their entirety:

- 1) Section L-108 – Underground Power Cable for Airports
- 2) Section L-110 – Airport Underground Electrical Duct Banks and Conduits
- 3) Section M-002 – T-Hangar Building, Slab, and Building Electrical [Section 002-2.1(m), 2nd paragraph]
- 4) Section M-002-F – Overhead Doors [Sections 2.02(B)(8), 2.02(B)(9), and 3.30(A)]
- 5) Section M-002-I – Electrical

TO READ:

“B. Specification requirements for the Filed Sub-Bid “Electrical” include all of the following listed Specification sections, in their entirety:

- 1) **Section M-002 – T-Hangar Building, Slab, and Building Electrical [Section 002-2.1(m), 2nd paragraph]**
- 2) **Section M-002-F – Overhead Doors [Sections 2.02(B)(8), 2.02(B)(9), and 3.30(A)]**
- 3) **Section M-002-I – Electrical”**

Addendum Item No. 1.2

DELETE, in Specification section M-002-I, part 1.02, item B, sub-item 10 which reads:

“Relocate, reset and/or repower five (5) taxiway lights.”

Note: The taxiway lighting work (new and relocated) is still included in the project, but is being removed from Specification section M-002-I and therefore, the filed sub-bid.

Addendum Item No. 1.3

REVISE, in Specification section M-002-I, part 1.02, item B, sub-item 13 which reads:

“Any other item of work hereinafter specified or indicated on the drawings referenced in paragraph 1.01.C.1.”

TO READ:

“Any other item of work hereinafter specified or indicated on the drawings referenced in paragraph 1.01.C.”

OTHER

Addendum Item No. 1.4

FOR INFORMATIONAL PURPOSES ONLY: The bookmark in the Specifications PDF file for M-002-I is mislabeled.

REVISE, in the bookmark item M-002-I, which reads:

M-002-I Hollow Metal Doors and Frame

TO READ:

“M-002-I Electrical”

Addendum Item No. 1.5

FOR INFORMATIONAL PURPOSES ONLY: The following attachments regarding existing soil conditions at the project site have been included with this addendum for the general information of the bidders. Any interpretations of this information is the sole responsibility of the bidders.

Attachments: Test Pit Logs (2 pages)
 Test Pit Sieve Results (2 pages)
 Photos of Test Pits (2 pages)

END OF ADDENDUM NO. 1

Field Data Collection Form

Project: Construct T-Hangars

Project No: 777033

Location: Gardner/Templeton, MA

Date: 5/9/2017

Test Pit No.: 1


Notes: Field Layout by CAR on 4/17/17

Test Pit Location: Approx. center of subsurface infiltration, 17' off edge of Taxiway 'A' EOP

X=517509.1494 Y=3025059.0679

TP #1

CAT Excavator - Gully from Gardner DPW
Witnessed by: CAR, STM, Ken Bank

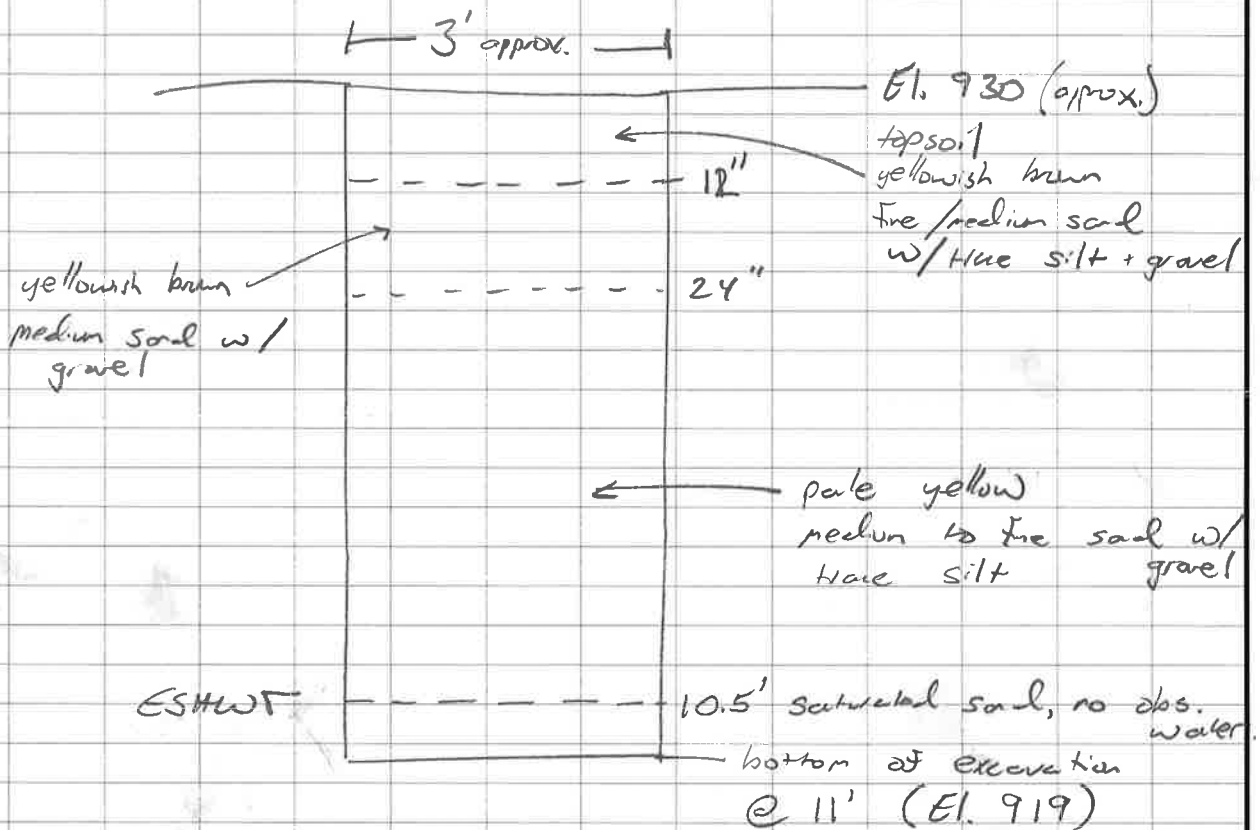

- Notes:
1. This test pit was performed after TP #2.
 2. Romex cable encountered at approx. 12" below grade. Tested and verified not to be an aerial cable (TW, RW light). Suspect abandoned cable to utility pole TBR as part of this project.
 3. Sample collected from bottom of TP - saturated.

By: S. Mancini 5/9/17

Field Data Collection Form

Project: Construct T-Hangars

Project No: 777033

Location: Gardner/Templeton, MA

Date: 5/9/2017

Test Pit No.: 2


Notes: Field Layout by CAR on 4/17/17 (to be field adjusted)

Test Pit Location: Approx. center of surface infiltration pond

X=517708.1011 Y=3025007.0020 - New TP location per revised pond location

TP #2

CAT excavator - Gary Tom Gardner DPW
Witnessed by: CAR, S.M., Ken Bork.

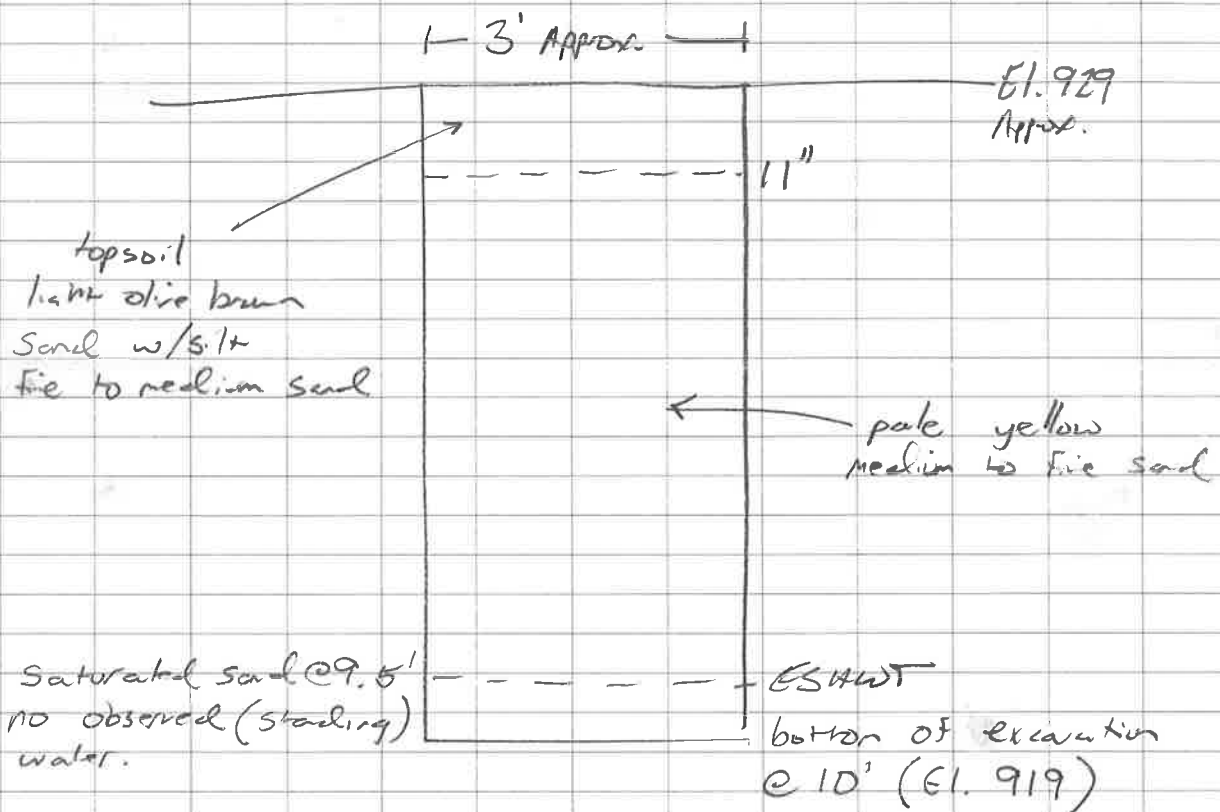


Note: Sample collected from bottom of TP. Sample was saturated.

By: S. Munnell 5/9/17

Client:	Gale Associates, Inc.		
Project:	Construct T-Hangars		
Location:	Gardner, MA	Project No:	GTX-306413
Boring ID:	---	Sample Type:	bucket
Sample ID:	1	Test Date:	05/17/17
Depth:	---	Test Id:	411153
Test Comment:	---		
Visual Description:	Moist, yellowish brown sand with gravel		
Sample Comment:	---		

Particle Size Analysis - ASTM D422

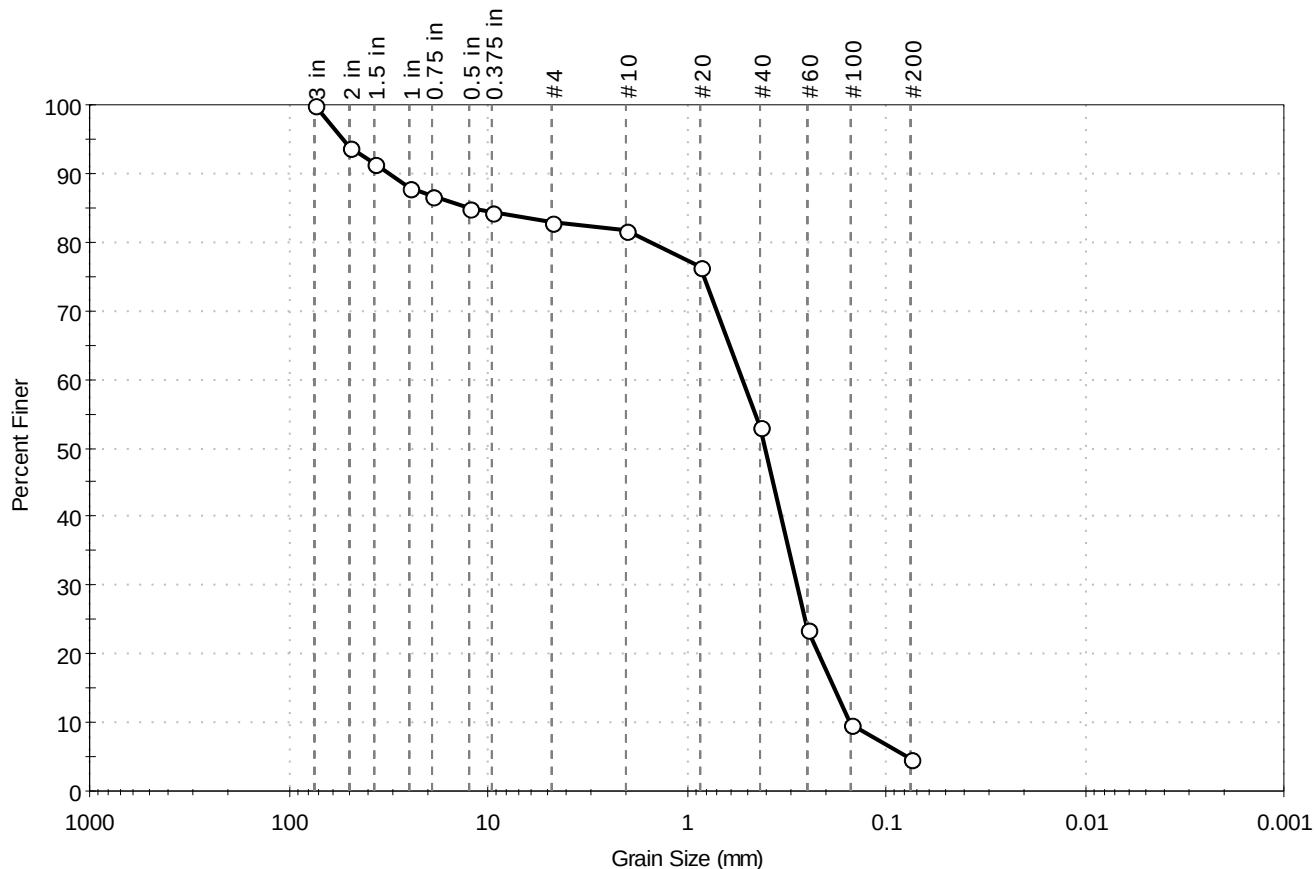

% Cobble	% Gravel	% Sand	% Silt & Clay Size
---	17.2	78.1	4.7

Sieve Name	Sieve Size, mm	Percent Finer	Spec. Percent	Complies
3 in	75.00	100		
2 in	50.00	94		
1.5 in	37.50	91		
1 in	25.00	88		
0.75 in	19.00	87		
0.5 in	12.50	85		
0.375 in	9.50	84		
#4	4.75	83		
#10	2.00	82		
#20	0.85	76		
#40	0.42	53		
#60	0.25	23		
#100	0.15	10		
#200	0.075	4.7		

Coefficients

$D_{85} = 12.1891 \text{ mm}$ $D_{30} = 0.2809 \text{ mm}$
 $D_{60} = 0.5204 \text{ mm}$ $D_{15} = 0.1827 \text{ mm}$
 $D_{50} = 0.4014 \text{ mm}$ $D_{10} = 0.1519 \text{ mm}$
 $C_u = 3.426$ $C_c = 0.998$

Classification

ASTM Poorly graded sand with gravel (SP)


AASHTO Fine Sand (A-3 (1))

Sample / Test Description

Sand/Gravel Particle Shape : ANGULAR
 Sand/Gravel Hardness : HARD

Client: Gale Associates, Inc.	Project No: GTX-306413
Project: Construct T-Hangars	
Location: Gardner, MA	
Boring ID: ---	Sample Type: bucket
Sample ID: 2	Tested By: jbr
Test Pit No. 2	Test Date: 05/17/17
Depth: ---	Checked By: emm
	Test Id: 411154
Test Comment: ---	
Visual Description: Moist, yellowish brown sand	
Sample Comment: ---	

Particle Size Analysis - ASTM D422

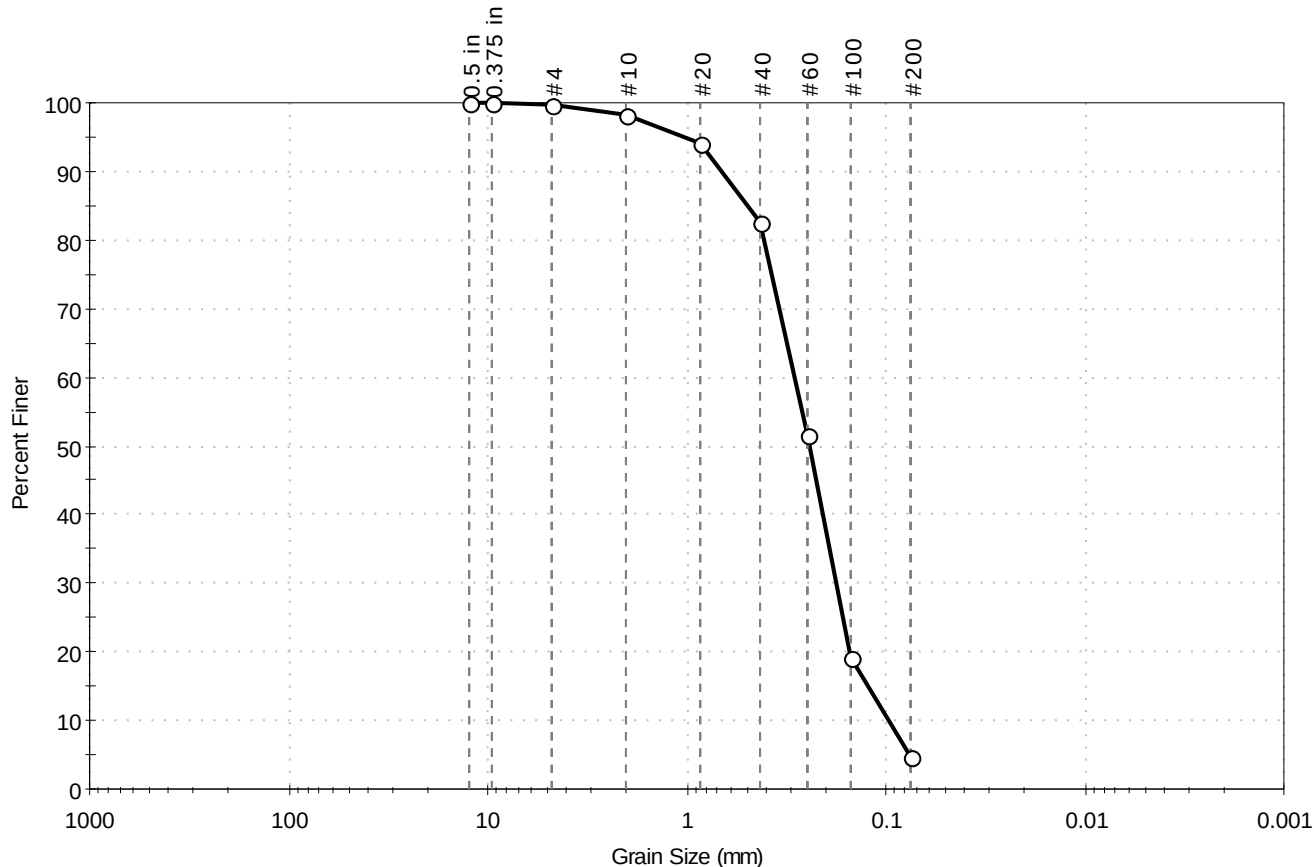

% Cobble	% Gravel	% Sand	% Silt & Clay Size
---	0.3	95.0	4.7

Sieve Name	Sieve Size, mm	Percent Finer	Spec. Percent	Complies
0.5 in	12.50	100		
0.375 in	9.50	100		
#4	4.75	100		
#10	2.00	98		
#20	0.85	94		
#40	0.42	83		
#60	0.25	52		
#100	0.15	19		
#200	0.075	4.7		

Coefficients

$D_{85} = 0.4903$ mm $D_{30} = 0.1780$ mm
 $D_{60} = 0.2882$ mm $D_{15} = 0.1233$ mm
 $D_{50} = 0.2433$ mm $D_{10} = 0.0968$ mm
 $C_u = 2.977$ $C_c = 1.136$

Classification

ASTM Poorly graded sand (SP)

AASHTO Fine Sand (A-3 (1))

Sample/Test Description

Sand/Gravel Particle Shape : ---
 Sand/Gravel Hardness : ---



Test Pit No. 1



Test Pit No. 2